



# Rough, Tough, Reliable

GENIE TELEHANDLERS



# Customers First Always

## Partnering for Success

Our dedication to lifting you higher extends well beyond the physical reach of our products. We thrive on building satisfying customer relationships because you, our customer, are at the center of everything we do.

Since 1966, we've been developing products to solve your worksite challenges — and that process never ends. Our team of product managers and engineers uses your input to design new products, featuring the latest technology to meet your changing needs. Then we manufacture those products to stringent standards that help increase quality, lower costs and give you exceptional value for years to come.

## Providing Superior Value

Our commitment doesn't end with the sale. Our dedicated service teams are available 24 hours a day, 365 days a year to provide support when you need it most. Our extensive parts network ships most parts within 24 hours, too. Simply put, we're always working to help increase your "up time" so you can be more successful.

Genie is driven by one goal: doing the right thing, at the right time for our customers. That's not just what we do; it's who we are. So tell us what you need. We're listening.





## Multiply Your Return With **Multi-Purpose Productivity**

You can buy a range of machines to lift, move and place materials, or you can save money with one highly advanced multi-purpose tool — the Genie® telehandler. With outstanding design and performance, Genie telehandlers provide all-around utility to answer all your work site needs. Available in three power-packed models, Genie telehandlers offer exactly what you need for productivity in limited-access areas or applications where high reach is needed. With a wide range of available attachments, Genie telehandlers have you covered for every job.

Genie telehandlers deliver amazing value through their versatility.

# An Investment In Versatility

Lift. Move. Place. Genie® telehandlers are the perfect choice for tasks both large and small. Easy to maneuver and offering high performance, with a variety of rugged attachments, Genie telehandlers meet the needs of most construction, masonry, landscape and farming applications.



## User-Friendly Controls

The spacious cab with tilt steering is just the beginning of operator comfort. Users will also quickly become comfortable with the easy-to-use, multi-function joystick that provides fast, precise positioning with minimal operator effort.

## Multi-Function at Multiple Sites


The infinitely variable hydrostatic transmission and four-wheel drive let Genie telehandlers operate on almost any worksite. Three steering modes, including front wheel, coordinated and crab steer, provide a tight turning radius for increased maneuverability.



## Enhanced Productivity

Operators can easily tailor the auxiliary hydraulics to meet the needs of the attachment being used. The Genie GTH™-5519 telehandler is equipped with a standard auxiliary hydraulic system that offers continuous or proportional flow control and full reversible flow to the boom tip.

**Genie telehandlers are a cost-effective investment for worksites.**

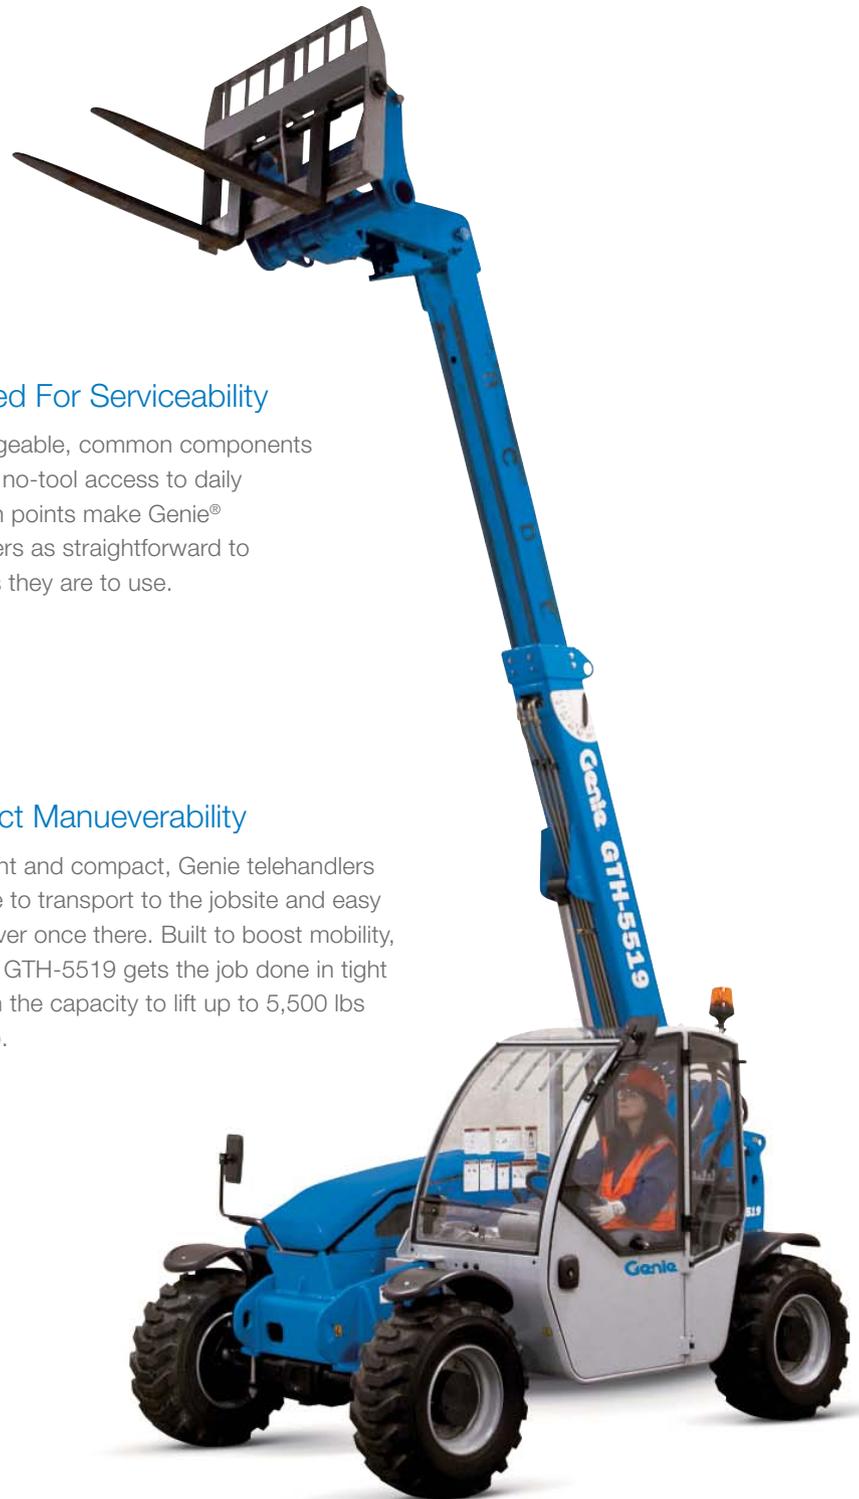


### Designed For Serviceability

Interchangeable, common components plus easy no-tool access to daily inspection points make Genie® telehandlers as straightforward to service as they are to use.

### Compact Maneuverability

Lightweight and compact, Genie telehandlers are simple to transport to the jobsite and easy to maneuver once there. Built to boost mobility, the Genie GTH-5519 gets the job done in tight areas with the capacity to lift up to 5,500 lbs (2,500 kg).

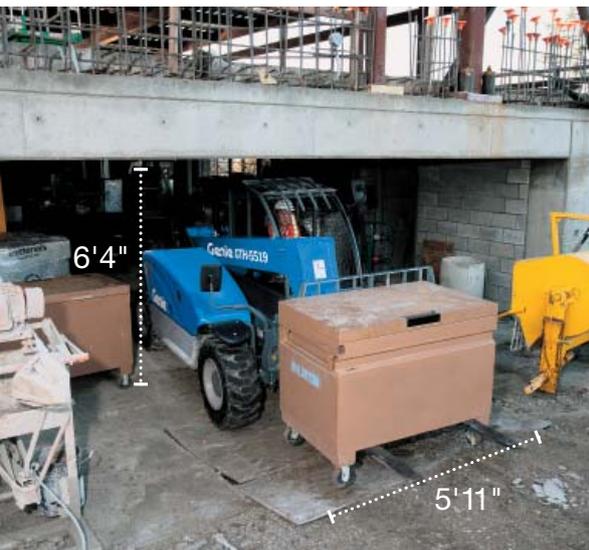

Compact Rough Terrain Model Available

GTH-5519

# Expand Your Options

Get more and do more without having to buy additional machinery. Just add one, two or more of the available attachments for your Genie® telehandler to get more productivity from a single unit. Attachments and accessories add job flexibility and improve efficiency.



## Genie Quick-Attach™ System

The manual Genie Quick-Attach system comes standard, allowing fast and easy attachment connection. Or choose the optional hydraulic Quick-Attach system to connect and lock on attachments in seconds from the comfort of your cab.



## Universal Skid Steer Adapter

This option allows you to pull up and attach to a wide variety of skid steer type attachments in just seconds, reducing your overall equipment costs and increasing the versatility of your fleet. (GTH™-5519 only)



## Industrial Grapple Bucket

This bucket clamps down to grab the load for easy and secure transport of hard-to-handle materials.



## Heavy-Duty Multi-Purpose Bucket

Equipped with a bolt-on cutting edge, perfect for a variety of applications, the multi-purpose bucket attachment increases worksite productivity.





## Additional Options And Accessories

- Cab air conditioner
- Foam-filled tires
- Semi-pneumatic solid rough terrain tires
- Flashing beacons and road lights
- Adjustable suspension seat

Availability of accessories and options varies depending on model and/or country standards.



### Truss Boom

The perfect solution for overhead lifting, the truss boom provides an extra 6 ft (1.83 m) of range to lift items such as trusses or bulky materials into place.



### Fully Enclosed Cab

Increase operator comfort and decrease fatigue in a clean, dry, quiet cab with standard windshield washer, as well as a heater and defroster for cold climates. Front window doubles as an emergency exit. Left and rear windows open for ventilation. Air conditioning is also available as an option.



### Work Lights Package

Increase productivity in low-light conditions with an optional boom work light, which functions as a headlight, and a rear cab-mounted work light for visibility when maneuvering the machine into place.



### Road Lights Package

The road lights package includes turn indicators and headlights, one reverse light and two rear lights for stop, turn and tail light functions.

# High Performance Redefined

Customers told us what they want in a telehandler and the Genie® GTH™-844 delivers. It's a completely new design with major structural and performance enhancements from stem to stern. This 8,000 lb (3,629 kg) capacity high reach telehandler has a maximum lifting height of 44 ft (13.41 m) and it's built for maximum reliability and durability. It is versatile and productive and will provide lower cost of ownership over the life of the machine.



## Narrower and More Maneuverable

At 96 inches wide (243.8 cm) and 94 inches high (239 cm), the GTH-844 can fit through tighter doorways and openings and can be transported without a special over-width permit. Combined with this narrower width, new axles make the unit easier to steer and maneuver around the work site, with an outside turning radius of only 13 ft. 9 in. (419 cm).



## Ergonomic Operator Station

Genie designed the GTH-844 with operator comfort and productivity in mind. The new, ergonomic operator station features a tilt steering wheel, a new single-lever joystick control, and new gauge and switch packages. A lower dash and side-mounted engine provide enhanced visibility as well. It all adds up to a better working environment, which improves productivity on every job.



**Genie telehandlers improve worksite productivity through efficient movement of material.**



### Tier 4i Compliant Engine

The GTH-844 is equipped with an environmentally friendly Tier 4i compliant Deutz or Perkins diesel engine, now mounted on the right side of the telehandler.



### Enhanced Serviceability

The side mounted engine is positioned for very easy access for maintenance and repair activities. Common service points and components are positioned for even easier access. That means less time spent on maintenance and more time at work on the job.



### Outstanding Lift Capacity

One thing that hasn't changed is this unit's lift capacity. With 6,000 lbs (2,721.6 kg) of capacity at maximum height and 2,000 lbs (907.2 kg) of capacity at maximum reach, the GTH-844 covers all your job site needs. It's ideal for loading, unloading, moving and placing loads or materials, as well as site preparation and clean up.

### Superior Handling

Climb hills or power through rough terrain with four-wheel drive, three steering modes, and an easy-to-use power shift transmission with three speeds in forward and reverse. A frame-leveling chassis also allows you to pick up or place loads on up to 10° side slopes.

# Maximize Your Reach

The Genie® GTH™-1056 10,000 lbs (4536 kg) capacity high reach telehandler has the reach and performance capabilities for demanding jobs. The GTH™-1056 offers you a lifting height of 56 ft 10 in (17.32 m), while a spacious cab and responsive controls enhance operator comfort.




## Twin Axle-Mounted stabilizers

Increase your productivity and lift capacity with standard twin-axle mounted stabilizers. These stabilizers allow the operator to maintain frame leveling capability while deployed. Conveniently located stabilizer controls allow you to deploy them from the comfort of the cab.

## Powerful Performance

A powerful turbocharged diesel engine and powershift transmission coupled with four-wheel drive improve the terrainability and overall performance of these models. Expanded engine options include a Tier III Perkins 123 hp and a Tier III John Deere 125 hp engine. A frame leveling feature, with 10° side to side leveling capability, keeps the chassis level while on slopes, allowing you to work on challenging jobsites.

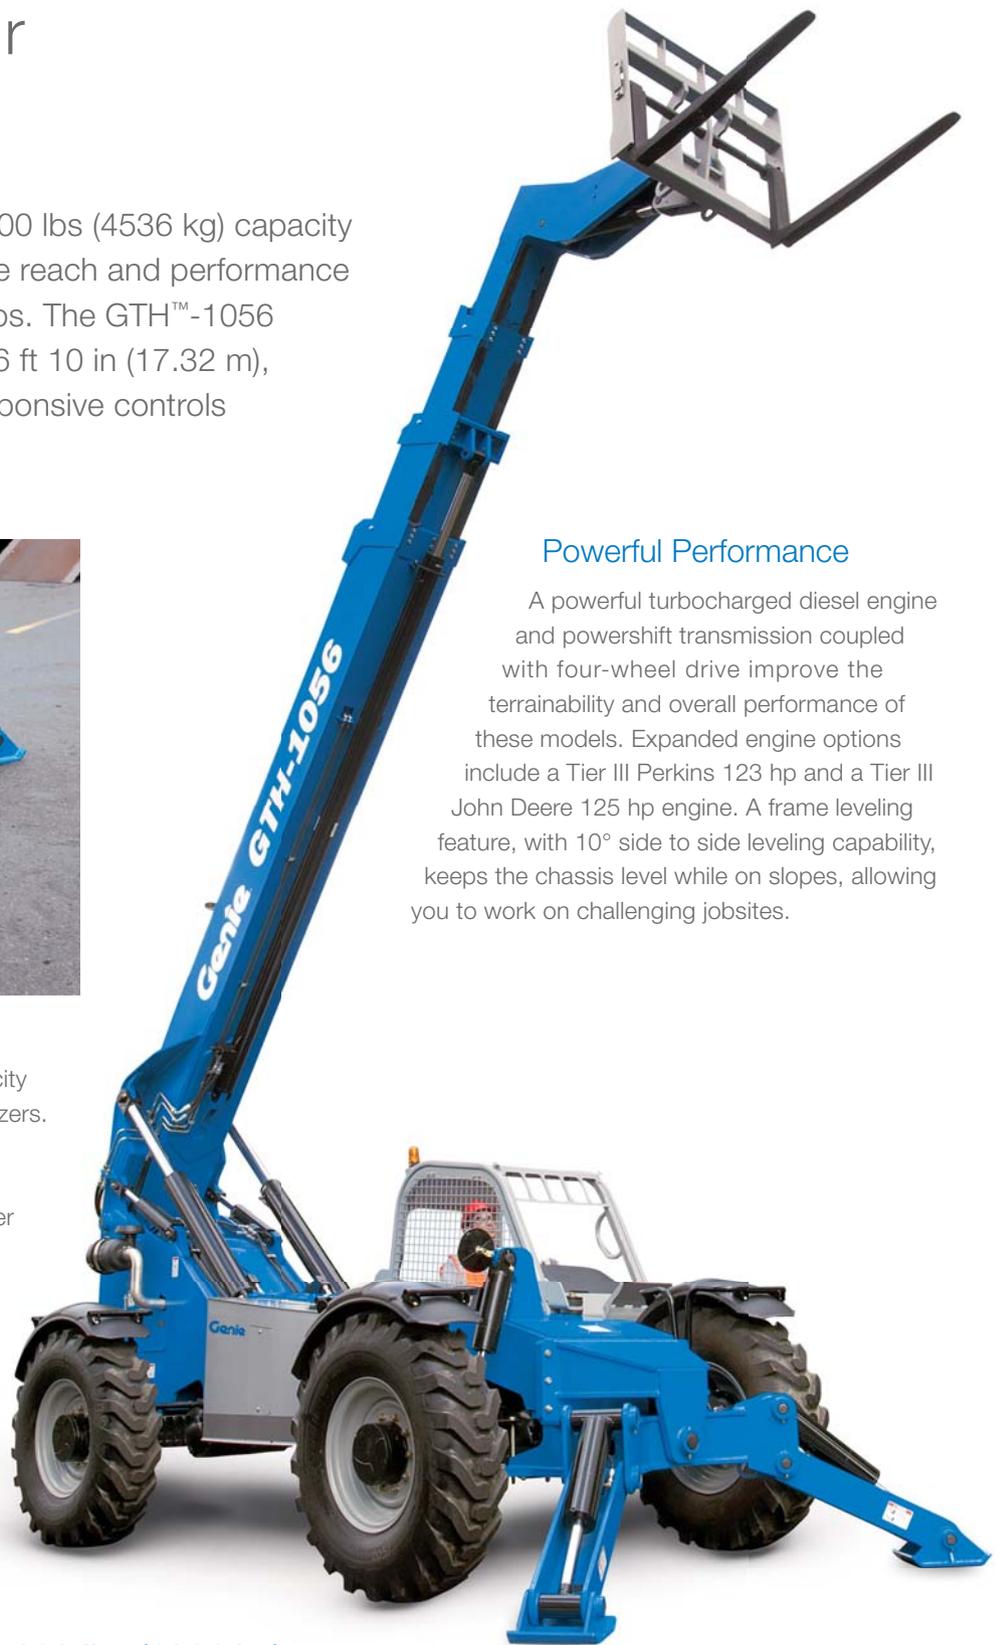

The GTH-1056 lifts up to 3,000 lbs (1361 kg) at its maximum reach of 42 ft (12.80 m).

## Increased Lift Capacity at Reach

Heavy loads like steel, masonry and bricks are no trouble for these rough terrain telehandlers. The GTH™-1056 provides up to 3,000 lbs (1,361 kg) of lift capacity at a maximum forward reach of 42 ft (12.80 m), allowing you to move substantial loads over obstacles.



## Compact Mobility

The sleek, compact GTH-1056 delivers an outside turning radius of 13 ft 3 in (4.04 m), making it easy to maneuver on congested jobsites without compromising your reach and lifting capabilities. Three selectable steering modes (crab, front wheel and coordinated) and superior ground clearance also expand your options to position yourself exactly where you need to be.



## Operator Comfort and Control

Experience exceptional control and comfort from the spacious newly designed cab. Simple, logical controls respond to your every command. The single hydraulically piloted multi-functional joystick, with integrated frame leveling control, allows you to control the boom and level the machine, up to 10° either side, without taking your hand off the joystick. Efficient operation is provided through easy to use controls, and diagnostic gauges and load charts positioned with the operator in mind. Excellent jobsite visibility is apparent whether you're sitting in a standard open cab or a closed cab fitted with easy to replace flat glass.



## Superior Serviceability

Easy no-tool access to daily inspection and service points make Genie® high reach rough terrain telehandlers easy to service and manage. Test ports are conveniently located at the main function manifold so that one qualified technician can easily check and test all hydraulic functions from the comfort of the cab.

## High Reach Models Available

**GTH-844** | **GTH-1056**

# Next-Generation Design

The new Genie® GTH™-1544 is the first high-reach telehandler in its class that can lift 15,000 lbs (6,803 kg) to a maximum height of 44 ft (13.4 m). Perfect for industries from mining and oil and gas to heavy construction and ports, it's among the most durable, reliable and powerful telehandlers on the market today.



## Industry-Leading Lift Capacity

When it comes to power and durability, the GTH-1544 is the industry workhorse. No other telehandler in this class can lift more weight higher. With 15,000 lbs (6,803 kg) of capacity at maximum height and 3500 lbs (1591 kg) of capacity at maximum reach, it opens up a whole new range of possibilities for lifting, carrying, and placing heavy loads.

## Work Smarter

Better comfort contributes to better productivity. The ergonomic operator station features streamlined European styling with a tilt steering wheel, a new single-lever joystick control, and highly visible gauge and switch packages. In addition, the low dash and side-mounted engine are positioned for maximum operator visibility — a boost for productivity on any job.



## Enhanced Maneuverability

New axles enhance the steering geometry of the GTH-1544 so it's easy to maneuver and position the unit exactly where you need it. At 96 inches wide (243.8 cm), it maneuvers easily through narrower doorways and can be transported without a special over-width permit.



## Traction and Steering

Rough terrain is no problem for the GTH-1544. With four-wheel drive, three steering modes, and a hydrostatic transmission, it's easy to handle on any work site. A frame leveling feature with 10° side-to-side leveling capability also helps you keep the chassis level on slopes.



## Enhanced Serviceability

With the engine mounted on the right side, technicians can easily access maintenance and repair points — saving time and keeping the machine on the ready-line for customer work.

## Environmentally Friendly

The GTH-1544 is also equipped with a turbocharged Tier 4i compliant diesel engine. The result: substantial power with reduced exhaust emissions.



# Add Versatility and Add Profits

The tremendous jobsite flexibility of Genie® high reach telehandlers is just the beginning. Add one, two or more of the available attachments and you'll be ready for just about any application that arises. You'll increase productivity from a single unit, all while improving your bottom line.



## Truss Boom

A 14 ft (4.27 m) variable reach truss boom provides extra vertical and horizontal reach to lift and place large, bulky loads such as roof trusses, frames and beams.



## Pallet Forks

Transport loads easily with standard 48 in (122 cm) forks and carriage. Or, select 60 or 72 in (152 or 183 cm) pallet forks to match your jobsite needs.



## Fully Enclosed Cab

Make all-weather operation possible with this fully enclosed cab equipped with windshield washer and wipers for visibility on rainy days, a standard heater/defroster to keep operators comfortable in cold climates, and windows that can be opened on both sides of the cab for increased ventilation. (Available with or without air conditioning on most models.)



#### Fork Frames

Expand your efficiency with fork frames for handling bulky materials and palletized loads. Choose 48, 60 or 72 in (122, 152 or 183 cm) wide frames.



#### Rotate Carriage

Allows up to 10° of carriage rotation clockwise and counter-clockwise for picking up or placing a load on a surface that's not level.

Available for High Reach Models

GTH™-844

GTH-1056

GTH-1544

# Additional Options and Accessories

## Engine

- 99 hp (73.8 kW) Perkins turbo-charged diesel engine Tier 4i compliant (GTH-844 only)
- 99 hp (73.8 kW) Deutz turbo-charged diesel engine Tier 4i compliant (GTH-844 only)
- 123 hp (91.72 kW) Perkins turbo-charged diesel engine Tier 4i compliant (GTH-1056 only)
- 125 hp (93.21 kW) Deutz turbo-charged diesel engine Tier 4i compliant
- Electric block heater
- Intake air heater (Deutz only)
- Cold weather package

## Cab

- Air conditioning
- Defroster fan
- Heater
- Right side sliding window
- Washer and wiper
- Glass over skylight bars\*
- Front window\*
- Front screen\*
- Right side screen\*
- Adjustable suspension seat
- Dual joystick controls

\* Add-ons for open canopy.


## Accessories

- Quick attach
- Flashing beacon
- Auxiliary hydraulic circuit to boom tip
- Fenders (set of 4)
- Foam-filled rough terrain tires
- Air-filled tires
- Mounted fire extinguisher



### Fenders

Streamlined, rugged fenders provide increased protection from mud and debris.

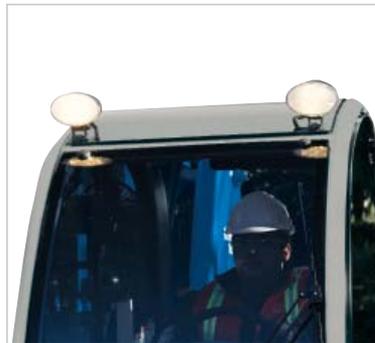

### Work Lights

Increase productivity in low light conditions with optional halogen work lights on top of the cab, which function as headlights. This option also comes standard with back-up lights and taillights.



### Road Lights

Illuminate your route with this option that includes two cab-mounted lights in front, along with two front turn signal lights, back-up light and taillight. Great for working in congested areas.


Availability of accessories and options varies depending on model and/or country standards.

# Specifications

## Telehandlers

MODEL	MAXIMUM LIFT CAPACITY		MAXIMUM LIFTING HEIGHT		MAXIMUM FORWARD REACH		OPERATING WEIGHT *	
	US	METRIC	US	METRIC	US	METRIC	US	METRIC
<b>Compact</b>								
<b>GTH™-5519</b>	5,500 lbs	2,500 kg	19 ft	5.79 m	11 ft	3.35 m	9,820 lbs	4,454 kg
<b>High Reach</b>								
<b>GTH-844</b>	8,000 lbs	3,629 kg	44 ft	13.41 m	27 ft	8.23 m	22,500 lbs	10,206 kg
<b>GTH-1056</b>	10,000 lbs	4,536 kg	56 ft 10 in	17.32 m	42 ft	12.80 m	30,000 lbs	13,608 kg
<b>GTH-1544</b>	15,000 lbs	6,804 kg	44 ft	13.41 m	27 ft	8.23 m	22,500 lbs	10,206 kg

\* Weight will vary depending on options and/or country standards.

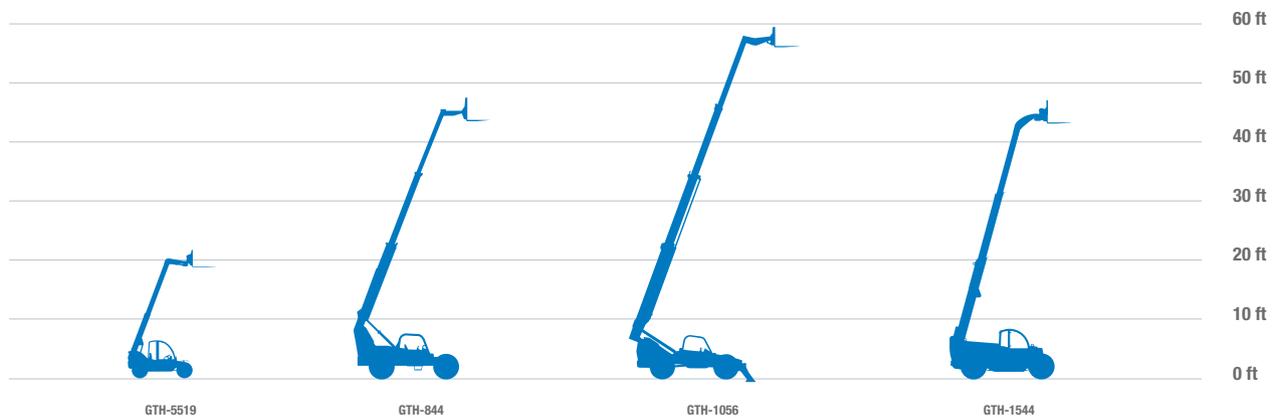







18340 NE 76th Street, P.O. Box 97030, Redmond, Washington 98073-9730

Telephone **+1 (425) 881-1800** · Toll Free in USA/Canada **+1 (800) 536-1800** · Fax +1 (425) 883-3475

[www.genielift.com](http://www.genielift.com)

### Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico  
Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Effective Date: January, 2013. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2013 Terex Corporation. GPB 3K 0109M . Part No. 109424.



EP1108424